

HNT Screw with underhead thread for decking and other wood structures, TX

NEW!

Description

Application	Screw recommended for decking. Special design ensures correct and continuous tightness of wooden members. Easy installation and removal in comparison to the 'clip' technology - stripping neighbouring decking boards is no longer necessary.
Type of installation	Pre-drilling is always recommended for very hard woods.
Substrate	Exotic wood, chipboard, plywood, wood, sterling board, MDF board
Material	A2 Stainless steel

Features and advantages



TX drive

TX drive guarantees optimum torque transfer.



Tight pan head and underhead thread

The width and shape of the head is matched to terrace boards, which in combination with underhead thread guarantees a secure and aesthetic installation



Special cutting point

This special point makes for a quick start installation of the screw and prevents wood from splitting.

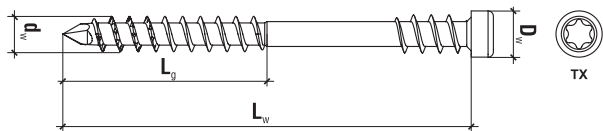
**POLISH
PRODUCER**



**A2
INOX**



Screws recommended for ribbed exotic hardwood decking - hidden fixing

HNT Screw with underhead thread for decking and other wood structures, TX



ø5,0	Code	$d_w \times L_w$ [mm]	L_g [mm]	D_w [mm]	TX	Pcs
						
	HNT-50050-A2	5,0 x 50	22,5	7	TX 25	100
	HNT-50060-A2	5,0 x 60	27,5	7	TX 25	100
	HNT-50070-A2	5,0 x 70	32,5	7	TX 25	100
	HNT-50080-A2	5,0 x 80	37,5	7	TX 25	100

