

MHP "MOLLY" steel anchor with straight hook



Description

For lightweight fixing of interior finish products in plasterboards and cavity materials.

Material: steel.


Protective coating

Zinc chromate coating

Features and advantages of the product

Secure fixing Sharp flange barbs prevent the rotation of anchor shell during fixing which ensures correct installation.

Anchor design After being fixed, collapsing arms form a large support surface on the reverse side of the plasterboard.

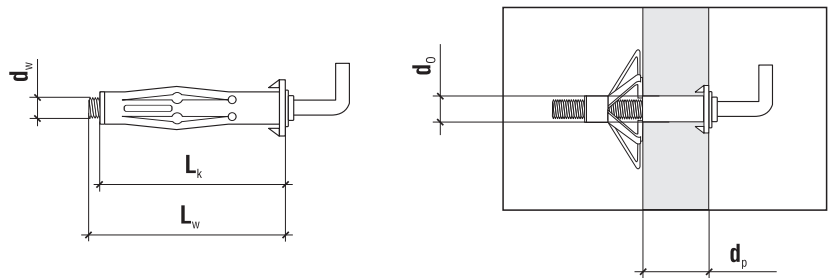

	Code	Bolt diameter and length $d_w \times L_w$ [mm]	Drill hole diameter d_o [mm]	Shank length L_k [mm]	Drywall thickness range d_p [mm]	Pcs.
ø4.0	MHP-04032	M4 x 38	9	32	6 - 12	100
ø5.0	MHP-05052	M5 x 58	11	52	12 - 16	50

RESISTANCE

Code and size	Characteristic/design resistance in 9.5 mm plasterboard [kN]	Characteristic/design resistance in 12.5 mm plasterboard [kN]	Characteristic/design resistance in 10 mm chipboard [kN]
MHP-M4	0.37 / 0.17	0.40 / 0.18	0.62 / 0.28
MHP-M5	0.53 / 0.24	0.78 / 0.35	1.28 / 0.58

Plasterboards according to PN-EN 520:2005 ;PN-B-79405:1997/Ap1:1999
Chipboards according to PN-EN 312:2005

Installation

