

WN Screw for exotic hardwood, TX

NEW!

Description

Application	Screw for exotic hardwood. Its special design prevents wood from cracking and splitting. Head angle of 60° together with ribs ensures its correct sinking in the material.
Type of installation	Pre-drilling is always recommended for very hard woods.
Substrate	Exotic wood, chipboard, plywood, wood, sterling board, MDF board
Material	A2 Stainless steel

Features and advantages



Countersunk head with TX drive Countersunk head ensures flush fitting of the screw in the installed member. TX drive guarantees optimum torque transfer.



Cutting ribs and head 60° Self-countersinking head ensures aesthetic finish result.



Shank ribs Shank ribs reduces driving torque by reaming the hole.



Special cutting point This special point makes for a quick start installation of the screw and prevents wood from splitting.

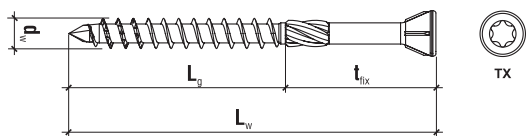
**POLISH
PRODUCER**



**A2
INOX**



Screws recommended for ribbed exotic hardwood decking - hidden fixing

WN Screw for exotic hardwood, TX



	Code	$d_w \times L_w$ [mm]	L_g [mm]	t_{fix} [mm]	TX 	Pcs 
ø4,0	WN-40040-A2	4,0 x 40	22	18	TX 15	200
	WN-40045-A2	4,0 x 45	30	15	TX 15	200
	WN-40050-A2	4,0 x 50	30	20	TX 15	200
	WN-40060-A2	4,0 x 60	35	25	TX 15	200
ø5,0	WN-50050-A2	5,0 x 50	30	20	TX 20	100
	WN-50060-A2	5,0 x 60	35	25	TX 20	100
	WN-50070-A2	5,0 x 70	40	30	TX 20	100
	WN-50080-A2	5,0 x 80	50	30	TX 20	100