

**WPC** Flange head screw, PH



PN-EN 14566  
+A1:2010



Description

Application	Flange head self-tapping screw for 1.0 mm thick sheets and wooden substrates.
Type of installation	This screw does not require prior drilling.
Material	Zinc plated carbon steel

Features and advantages



**Flange head with PH drive**

Flange head ensures tight fastening of the installed element. Commonly used PH drive also makes installation easier.




**Correct thread pitch and length**

The right pitch ensures correct installation of members.



**Sharp point**

Sharp point ensures easier and faster screw installation.

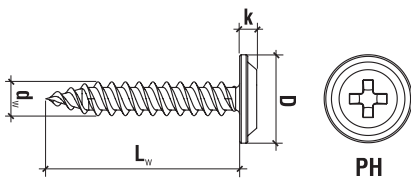

	Code	$d_w \times L_w$ [mm]	D [mm]	k [mm]	PH	Pcs
<b>ø4.2</b>	WPC-42013	4.2 x 13	11.5	2	PH 2	1000
	WPC-42016	4.2 x 16	11.5	2	PH 2	1000
	WPC-42019	4.2 x 19	11.5	2	PH 2	1000
	WPC-42025	4.2 x 25	11.5	2	PH 2	500
	WPC-42032	4.2 x 32	11.5	2	PH 2	500
	WPC-42040	4.2 x 40	11.5	2	PH 2	400
	WPC-42050	4.2 x 50	11.5	2	PH 2	300
	WPC-42065	4.2 x 65	11.5	2	PH 2	250